

# P420i

## PERFORMANCE



### Dual-Sided Colour Card Printing is Easier and Faster than Ever

The Zebra P420i card printer is a robust, dual-sided card printer with an LCD display and convenient easy-to-use features for producing high quality, personalised photo ID cards on-demand for high volume applications.

Use the P420i to print:

- Employee/Student ID cards
- Time and Attendance cards
- Access Control cards

### Zebra P420i Advantages

**Advanced Colour Printing:** Enhanced colour-processing firmware and new richer colour formulation.


**Reliable Operation:** Full metal enclosure and field-proven reliable P310 engine. Reject hopper separates cards that fail encoding prior to printing.

**i Series Intelligent Printing System:** Enhanced i Series functionality makes high image quality card printing a simple function for all users. The system features:

- Advanced RFID Technology
- Automatic Driver Configuration
- Intelligent Colour Optimisation
- Ribbon Image Counter & Ribbon Low Notification
- Enhanced Ribbon Formulation

### Basic Specifications:

- 35 Second/Card Print Speed (YMCKOK)
- Two-line LCD display with printer status and user commands
- Full metal enclosure with viewing window
- Full colour or Monochrome Dual-Sided Card Printing
- Parallel or USB Interface
- 100 Card Capacity Feeder
- i Series Printers require the use of TrueColours™ i Series ribbons for full colour printing

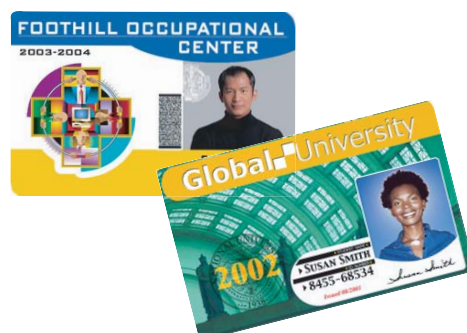

P420i CARD PRINTER

# P420i

## Card Printer Product Specifications



### General Specifications

- » High speed printing
- » 102 cards/hour full color, single-sided (YMCKOK)
- » 4MB image memory standard
- » Standard card flip over feature for dual-sided printing
- » Windows® drivers for 98, NT, 2000, ME, XP
- » Bi-directional driver communication
- » Two year printer warranty
- » Two year (unlimited passes) printhead warranty
- » Pass-code electronic lock

### Color Printing

- » Color dye sublimation or monochrome thermal transfer printing
- » 35 seconds per card full color single-sided (YMCKO/K)
- » 300 dpi (11.8 dots/mm) print resolution

### Bar Codes

- » Code 39, Code 128 B & C with & without check digit
- » 2 of 5 & 2 of 5 Interleaved » UPC-A, EAN 8 & EAN 13
- » PDF-417 2D bar code and other symbologies can be printed via Windows drivers

### Fonts

- » True Type fonts via Windows driver

### Card Specifications

- » Types: PVC, PVC Composite
- » Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- » Magnetic Stripe-ISO 7811 » Smart Card-ISO 7816-2
- » Card thickness: 30 mil (.76mm) to 60 mil (1.524mm)
- » Card feeder capacity: 100 cards (30 mil)
- » Card output hopper capacity: 100 cards (30 mil)

### Electrical

- » 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- » FCC Class B, CE, UL and CUL approved

### Ribbon Specifications

- » Series Printers require the use of Series ribbons for full color printing
- » Monochrome: 1500 & 1000 cards/roll
- » Monochrome colors: black, red, blue, green, silver, gold white & scratch-off grey.
- » KdO: 500 cards/roll
- » KrO: 500 cards/roll
- » YMCKOK: 170 cards/roll
- » YMCKO: 200 & 330 cards/roll
- » Overlay varnishes: thermal transfer, clear and holographic overlays available



### Communications Interface

- » Centronics Parallel (parallel cable included)
- » USB Option
- » Ethernet Option

### Mechanical

- » Width: 20.90in (523mm)
- » Depth: 10.17in (253mm)
- » Height: 10.76in (269mm)
- » Weight: 27.5lbs (12.5kg)

### Environmental

- » Operating Temperature: 60°F to 86°F (15°C to 30°C)
- » Operating Humidity: 20% to 65% non-condensing
- » Storage Temperature: 23°F to 158°F (-5°C to 70°C)
- » Storage Humidity: 20% to 70% non-condensing
- » Ventilation: Free air

### Options

- » USB Interface
- » Ethernet
- » Smart card contact station (30 mil cards only)
- » Magnetic encoder (30 mil cards only)
- » Cleaning supplies
- » Service manual